


Features

- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in MPPT solar charge controller
- MAX PV Array Open Circuit Voltage: 450V
- Can provide the power to the load without battery
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- Parallel operation with up to 3 units
- WIFI remote monitoring (optional)

Introduction


PV1800 PRO is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV1800 PRO Series can run without battery. The Maximum PV array open circuit voltage can reach 450V and MPPT voltage is 150~430Vdc, which Can help customers make full use of solar energy.

Back panel printing description

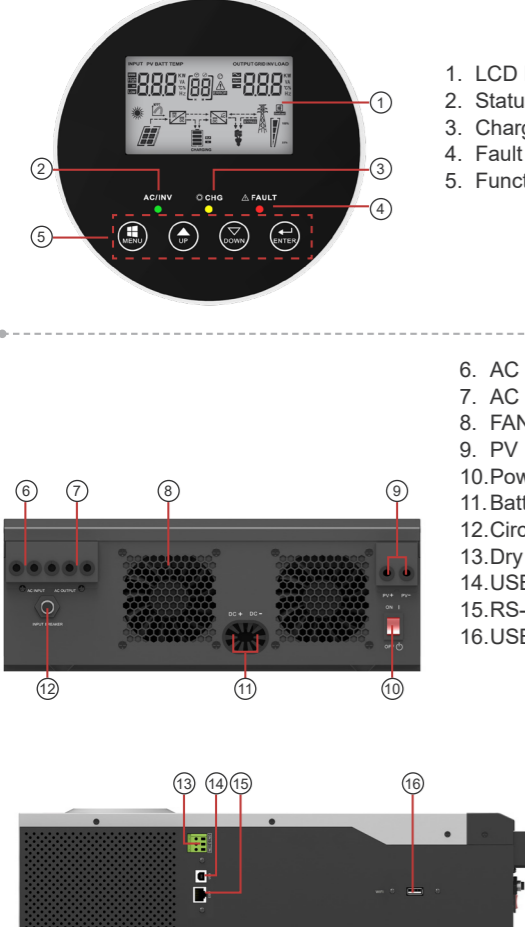

1. LCD Display
2. Status Indicator
3. Charging Indicator
4. Fault Indicator
5. Function Buttons
6. AC Input
7. AC Output
8. FAN
9. PV Input
10. Power On/Off Switch
11. Battery Input
12. Circuit breaker
13. Dry Contact
14. USB
15. RS-485 Communication port
16. USB WiFi

Solar system connection

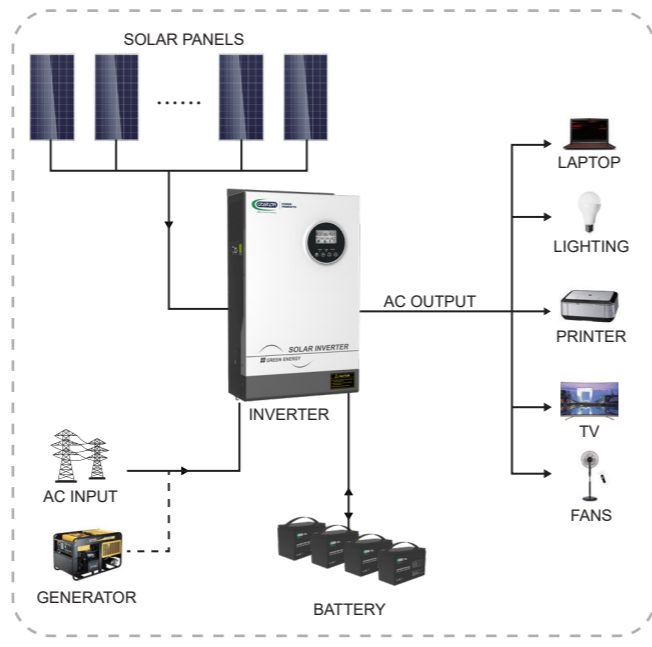

Specification

MODEL	PV18-3024 PRO	PV18-3524 PRO	PV18-5248 PRO	PV18-5548 PRO			
Nominal Battery System Voltage	24VDC		48VDC				
INVERTER OUTPUT	Rated Power	3000VA / 3000W	3500VA / 3500W	5200VA / 5200W	5500VA / 5500W		
	Surge Power	6000W	7000W	10400W	11000W		
	Waveform	Pure sine wave					
	AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)					
	Inverter Efficiency(Peak)	90%					
	Transfer Time	10ms (UPS / VDE4105) / 20ms (APL)					
	AC INPUT	Voltage	230VAC±5%				
Selectable Voltage Range		170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VED4105)					
Frequency Range		50Hz / 60Hz(Auto sensing)					
BATTERY	Normal voltage	24VDC	48VDC				
	Floating Charge Voltage	27.4VDC	54.8VDC				
	Overcharge Protection	30VDC	60VDC				
SOLAR CHARGER & AC CHARGER	Maximum PV Array Open Circuit Voltage	450VDC					
	Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)					
	Maximum PV Array Power	4000W	4000W	5000W	6000W	6000W	
	PV Array MPPT Voltage Range	150~430 VDC					
	Maximum Solar Charge Current	80A	100A	100A	80A	100A	120A
	Maximum AC Charge Current	60A	80A	80A	60A	80A	100A
	Maximum Charge Current	80A	100A	100A	80A	100A	120A
MECHANICAL SPECIFICATIONS	Machine Dimensions (W*H*D)(mm)	272*355*100		295*528*121			
	Package Dimensions (W*H*D)(mm)	540*395*241		628*425*251			
	Net Weight(kg)	11		14			
	Gross Weight(kg)	12		15			
	OTHER	Humidity	5% to 95% Relative humidity (Non-condensing)				
Operating Temperature		0°C~50°C					
Storage Temperature		-15°C ~60°C					

The technical specifications of this document are subject to change without any notice

Goscor Power Products (Pty) Ltd
 Web : www.goscor-power-products.co.za Tel : 087 542 0256 / 087 806 6872
 Shop : www.offgridpowersolutions.co.za Email : powerproducts@goscor.co.za