


Features

- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- MAX PV Array Open Circuit Voltage: 450V
- Can provide the power to the load without battery
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- WIFI remote monitoring (optional)
- Parallel operation with up to 3 units

Introduction


PH1800 PRO is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PH1800 PRO Series can run without battery. The Maximum PV array open circuit voltage can reach 450V and MPPT voltage is 150~430V, which can help customers make full use of solar energy.

Back panel printing description

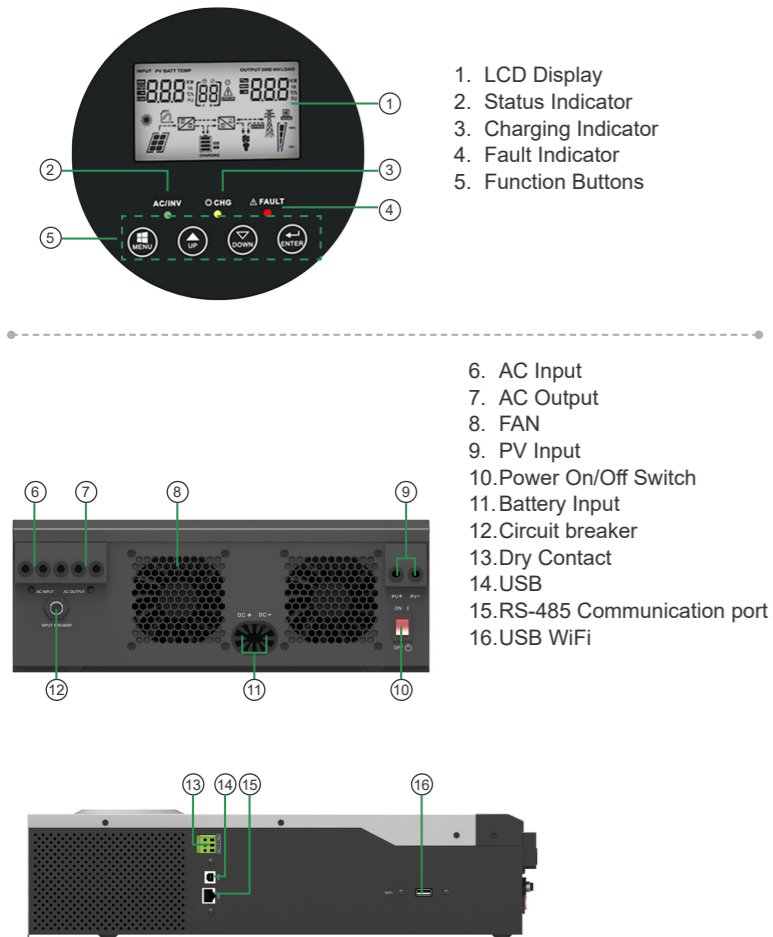

1. LCD Display
2. Status Indicator
3. Charging Indicator
4. Fault Indicator
5. Function Buttons
6. AC Input
7. AC Output
8. FAN
9. PV Input
10. Power On/Off Switch
11. Battery Input
12. Circuit breaker
13. Dry Contact
14. USB
15. RS-485 Communication port
16. USB WiFi

Solar system connection

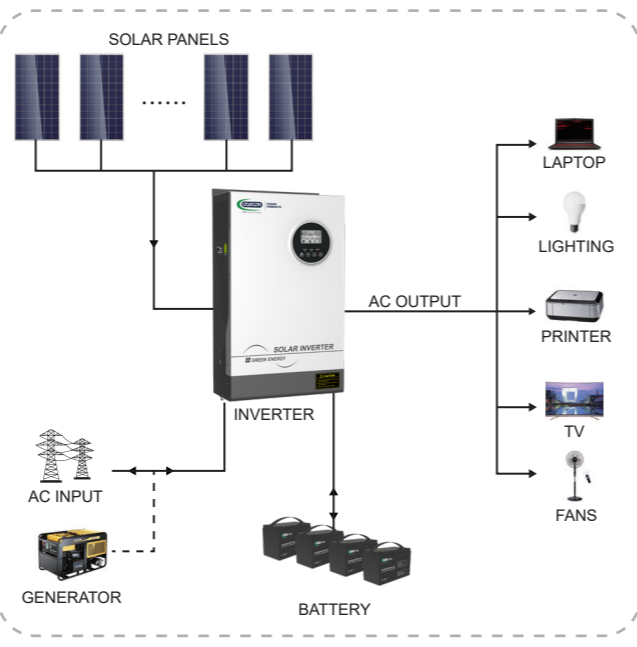

Specification

MODEL	PH18-3024 PRO	PH18-3524 PRO	PH18-5248 PRO	PH18-5548 PRO		
Nominal Battery System Voltage	24VDC		48VDC			
INVERTER OUTPUT						
Rated Power	3000VA / 3000W	3500VA / 3500W	5200VA / 5200W	5500VA / 5500W		
Surge Power	6000W	7000W	10400W	11000W		
Waveform	Pure sine wave					
AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)					
Inverter Efficiency(Peak)	90%~93%					
Transfer Time	10ms (UPS / VDE4105) 20ms (APL)					
AC INPUT						
Voltage	230VAC±5%					
Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL)					
Frequency Range	50Hz/60Hz(Auto sensing)					
BATTERY						
Normal voltage	24VDC		48VDC			
Floating Charge Voltage	27.4VDC		54.8VDC			
Overcharge Protection	30VDC		60VDC			
SOLAR CHARGER & AC CHARGER						
Maximum PV Array Open Circuit Voltage	450VDC					
Maximum PV Array Power	4000W	4000W	5000W	6000W		
PV Array MPPT Voltage Range	150~430 VDC					
Maximum Solar Charge Current	80A	100A	100A	80A	100A	120A
Maximum AC Charge Current	60A	80A	80A	60A	80A	100A
Maximum Charge Current	80A	100A	100A	80A	100A	120A
MECHANICAL SPECIFICATIONS						
Machine Dimensions (W*H*D)(mm)	272*355*100		295*528*121			
Package Dimensions (W*H*D)(mm)	540*395*241		628*425*251			
Net Weight(kg)	11		14			
Gross Weight(kg)	12		15			
OTHER						
Humidity	5% to 95% Relative humidity (Non-condensing)					
Operating Temperature	0°C ~50°C					
Storage Temperature	-15°C ~60°C					

The technical specifications of this document are subject to change without any notice

Goscor Power Products (Pty) Ltd
 Web : www.goscor-power-products.co.za Tel : 087 542 0256 / 087 806 6872
 Shop : www.offgridpowersolutions.co.za Email : powerproducts@goscor.co.za